

FIG. 1

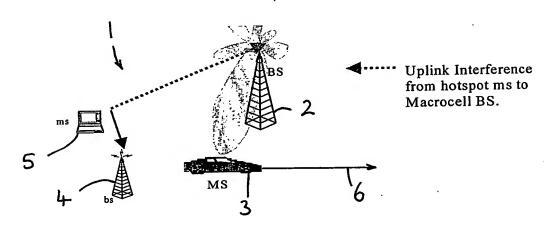


FIG. 2

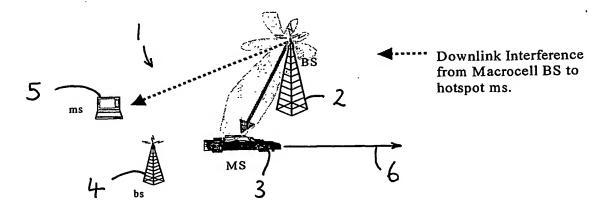
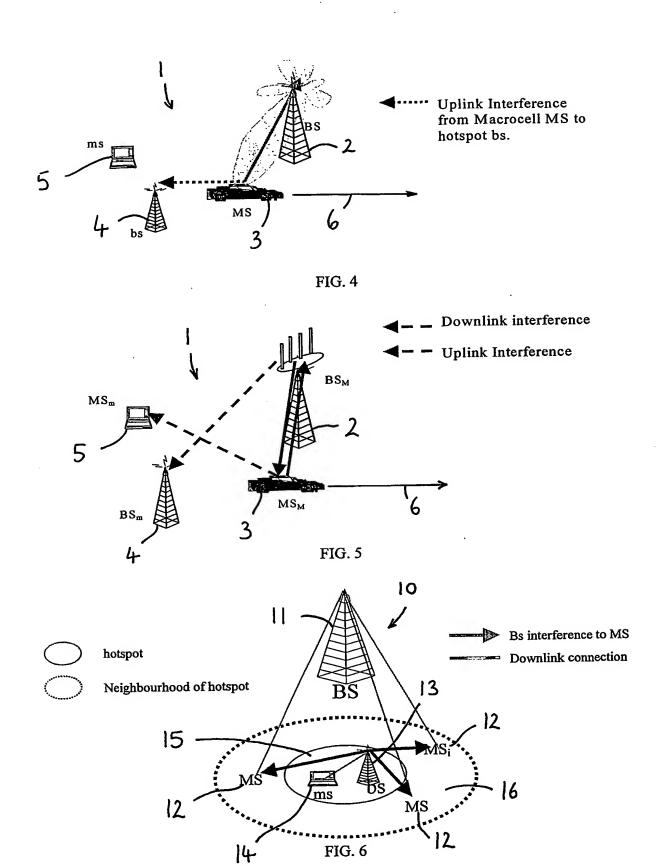


FIG. 3






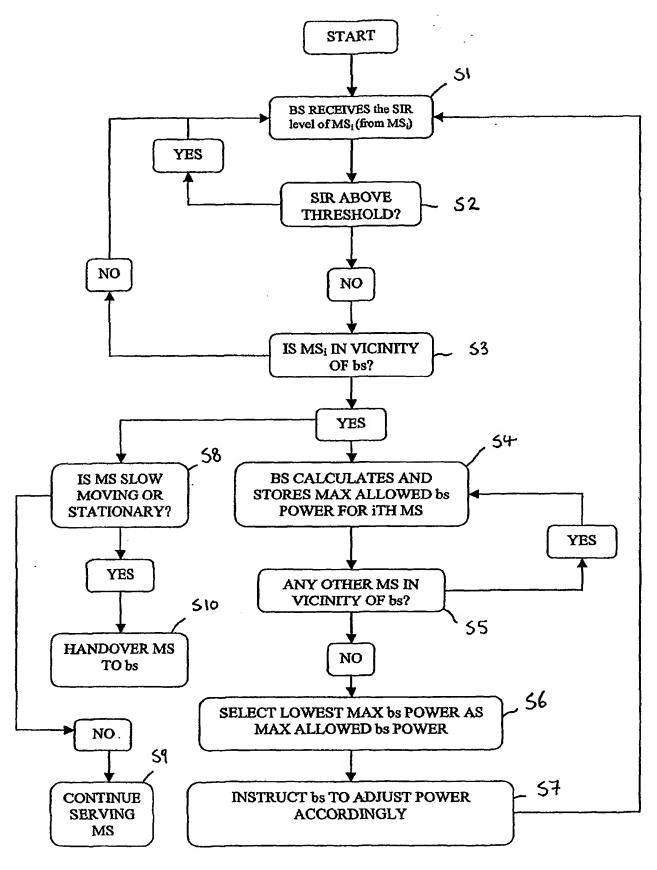


FIG. 7

10 /5: 1530



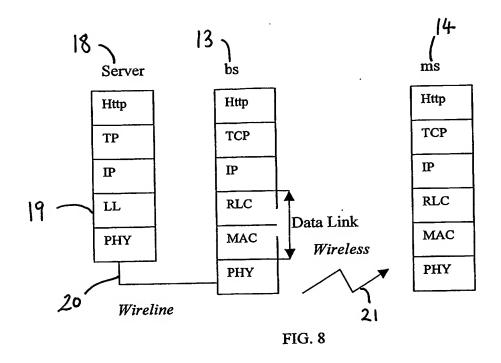

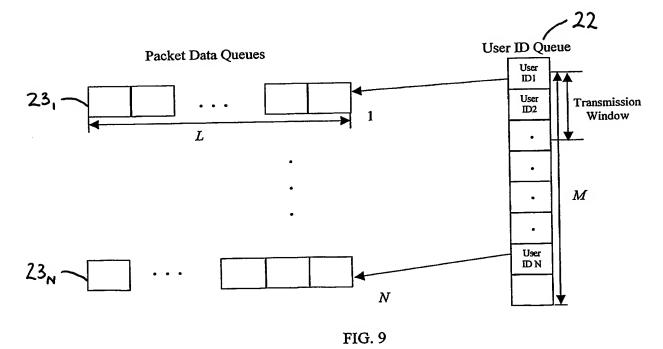

User i side

56

10 /5: 556


60 - 51 Queuing Policy 52 Remaining Message 53 ID Order Length {SINR₁,SINR₂, $\{L_1,L_2,\ldots,L_M\}$ $...,SINR_M$ } 55 54 **Pathloss** Maximum Allowable $\{Rmax_1,Rmax_2,...,Rmax_M\}$ Power (Smax) Io+Pathloss (dB) Formula (1), Link Adaptation Interference


 $\sum \phi_i \leq 1$

 $\{R_1, R_2, ..., R_{DT}\}$


FIG. 10

bs side

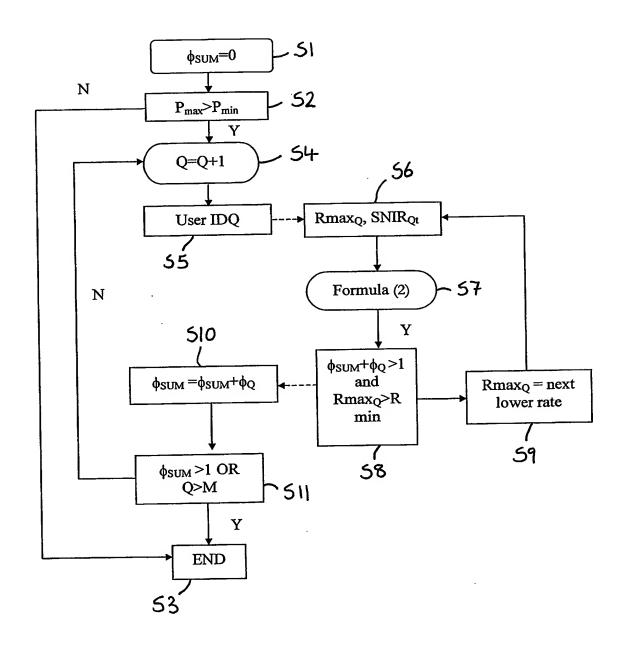

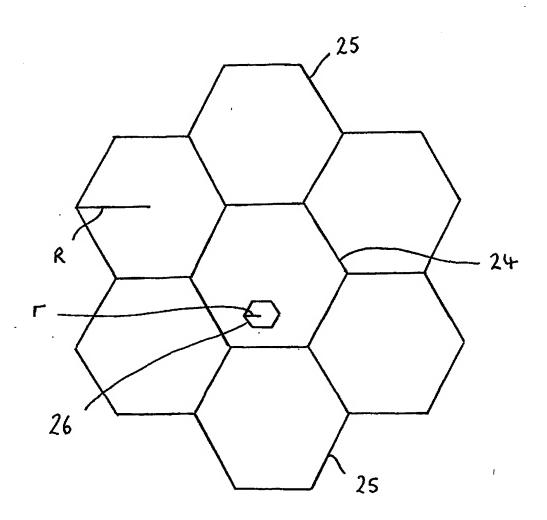

F19. 12

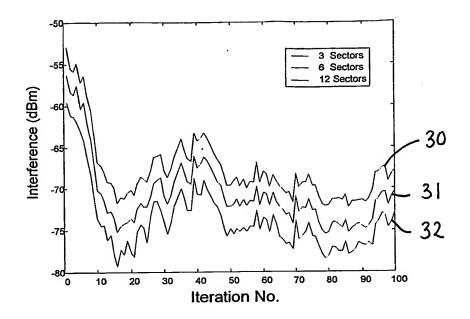

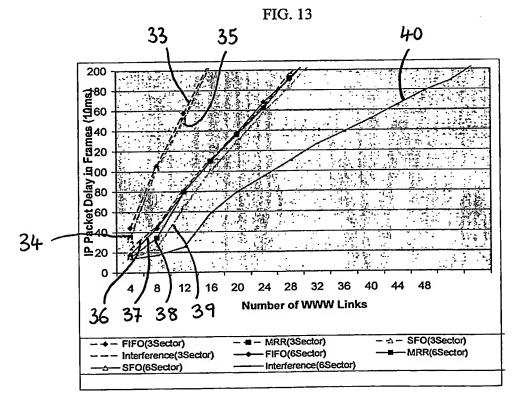


FIG. 14

9/9

WO 2004/008794

•

PCT/GB2003/003070

